


# GS.Gate

genua.

## Hardware



GS.Gate

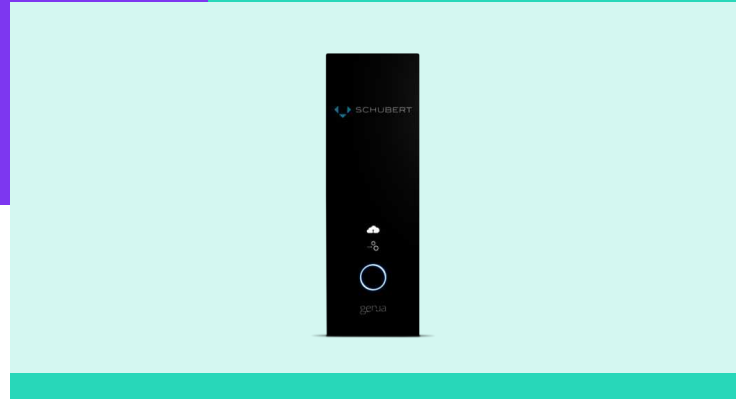

MODEL	
<b>Hardware</b>	
Revision	1.0
CPU	2 Cores, 2.6 GHz
Memory	16 GB
Network interfaces min.	3 x 1 Gbit/s
Network interfaces max.	3 x 1 Gbit/s
Network interfaces 10 Gbit/s max.	-
Flash Drive	240 GB
DVD-ROM Drive	-
Graphics Connector	-
Serial Ports	-
USB Port	-
Smartcard Slot	-
<b>Chassis</b>	
Power Supply	optional extern
Power consumption load	40.8 W
BTU/h load	139.1
Fixture	DIN rail mount
Width	75 mm
Height	230 mm
Depth	189 mm
Weight	2.5 kg
Weight (incl. Packaging)	4 kg

# GS.Gate



## Hardware



	ENVIRONMENT OPERATION	ENVIRONMENT STORAGE
Voltage	24 V DC (min. 20.4 V, max. 28.8V), max. 1.7 A	-
Temperature	0 - 45 °C at natural convection	-20 - 60 °C at natural convection
Humidity	10 - 90 % non condensing	10 - 90 % non condensing
Shock	25 G 6 ms	25 G 6 ms
Vibration	2-200 Hz, 1g	2-200 Hz, 1g
Norms	CE	-